

# SOLAR LINE IMPEDANCE STABILIZATION NETWORK


## SOLAR TYPE 21601-50-TS-50-N

### Specifications:

Current rating: ..... 50 amperes  
Inductance: ..... 50  $\mu$ H  
Frequency range (recommended): ..... 9 kHz – 30 MHz  
Voltage (line to ground): ..... 400 VDC, 270 V 50 – 60 Hz, 135 V 400 Hz  
Power connections: ..... TS 1/4-20 threaded stud  
RF connector: ..... Type N  
Coupling capacitor: ..... 0.25  $\mu$ F  
Circuit: ..... Single  
Case size: ..... 10.29" x 9.25" x 20.00" (26.14 cm x 23.50 cm x 50.80 cm)  
Overall length with base plate: 23.75" (60.33 cm)

**Remarks:** Designed for CISPR 16-1-2 Ed. 1.2. Specifications subject to change without notice.

Rev. March 3, 2017

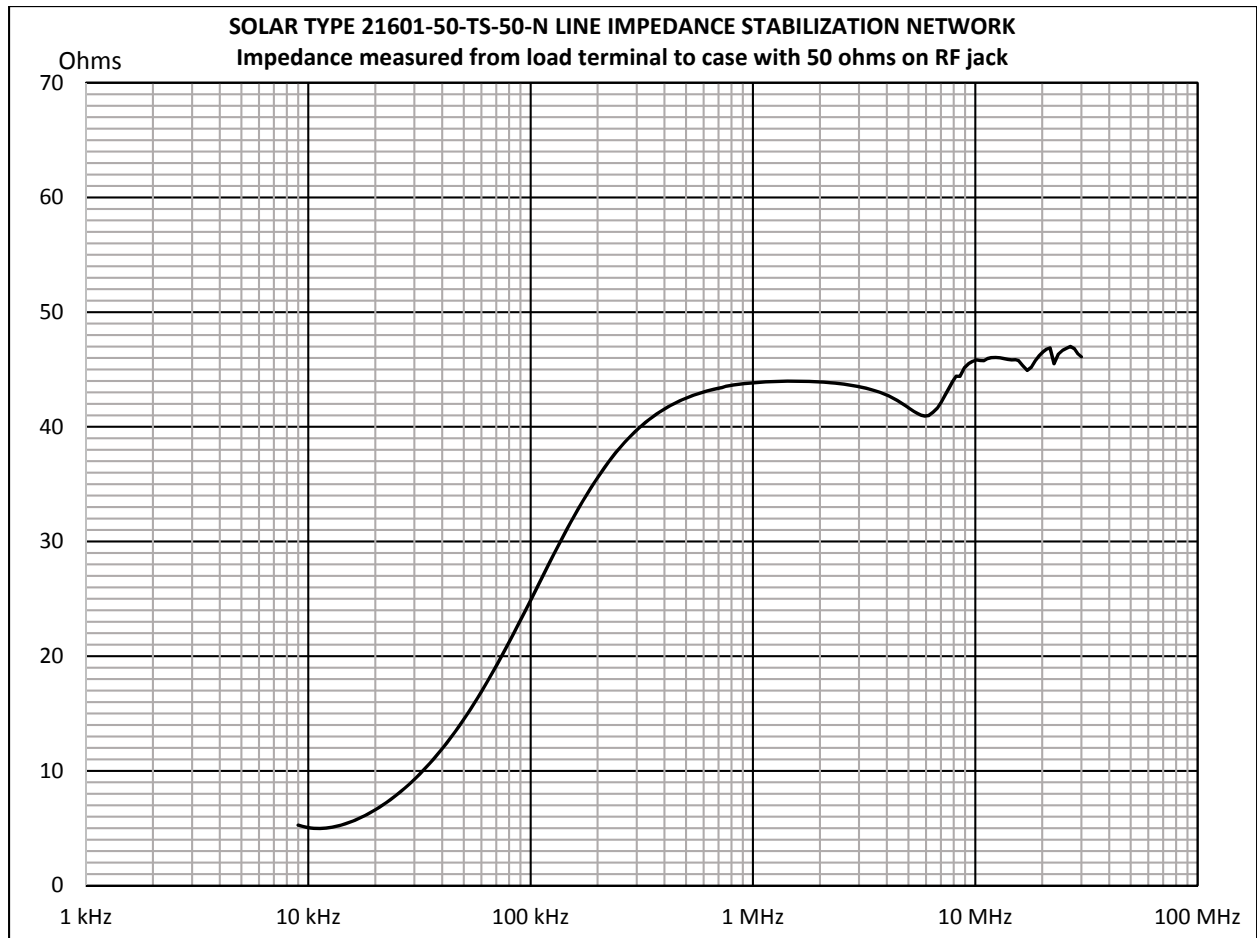

## SOLAR ELECTRONICS COMPANY

*A Division of A.T. Parker, Inc.*

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com