

# SOLAR LINE IMPEDANCE STABILIZATION NETWORK


## SOLAR TYPE 2309-50-BP-25-N

### Specifications:

Current rating: ..... 25 amperes  
Inductance: ..... 50  $\mu$ H  
Frequency range (recommended): ..... 10 kHz – 100 MHz  
Voltage (line to ground): ..... 400 VDC, 270 V 50 – 60 Hz, 135 V 400 Hz  
Power connections: ..... 3/4" standard binding posts  
RF connector: ..... Type N (2)  
Coupling capacitor: ..... 0.25  $\mu$ F  
Circuit: ..... Dual  
Case size: ..... 13.48" x 7.25" x 13.25" (34.24 cm x 18.42 cm x 33.66 cm)  
Overall length with base plate: 17.25" (43.82 cm)

**Remarks:** Designed for MIL-STD-461D/E/F/G. Specifications subject to change without notice.

Rev. September 3, 2016

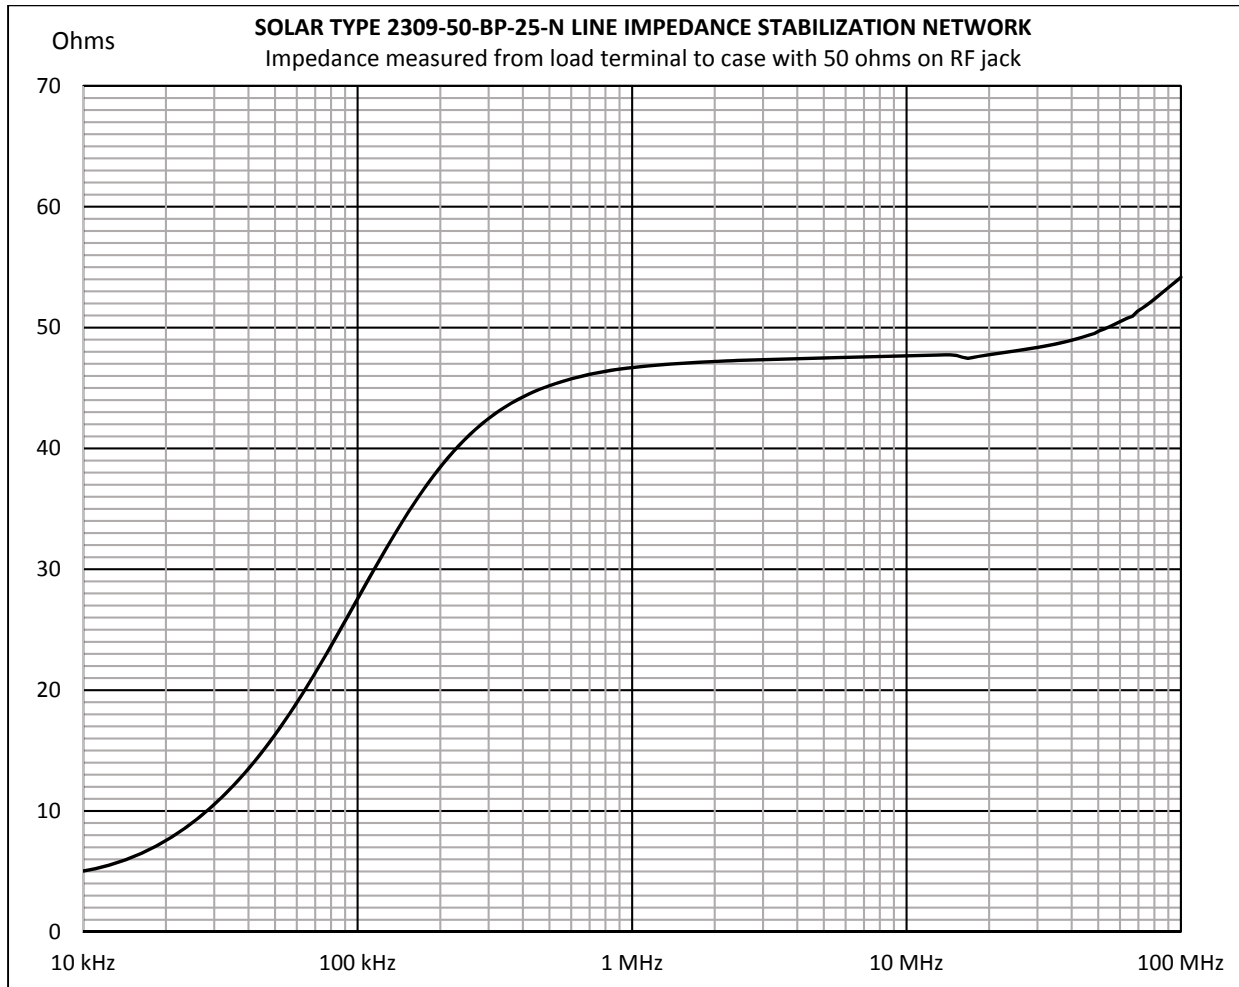

## SOLAR ELECTRONICS COMPANY

*A Division of A.T. Parker, Inc.*

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com