

# SOLAR LINE IMPEDANCE STABILIZATION NETWORK


## SOLAR TYPE 2918-5-TS-500-N

### Specifications:

Current rating: ..... 500 amperes  
Inductance: ..... 5  $\mu$ H  
Frequency range (recommended): ..... 10 kHz – 1.0 GHz  
Voltage (line to ground): ..... 1000 VDC, 600 V 50 – 60 Hz, 480 V 400 Hz, 240 V 800 Hz  
Power connections: ..... TS, 1/2-20 threaded stud  
RF connector: ..... Type N  
Coupling capacitor: ..... 0.10  $\mu$ F  
Circuit: ..... Single  
Case size: ..... 10.29" x 9.25" x 20.00" (26.14 cm x 23.50 cm x 50.80 cm)  
Overall length with base plate: 23.75" (60.33 cm)

**Remarks:** Designed for DO-160G (when used with external 10  $\mu$ F capacitor).  
Specifications subject to change without notice.

Rev. September 3, 2016

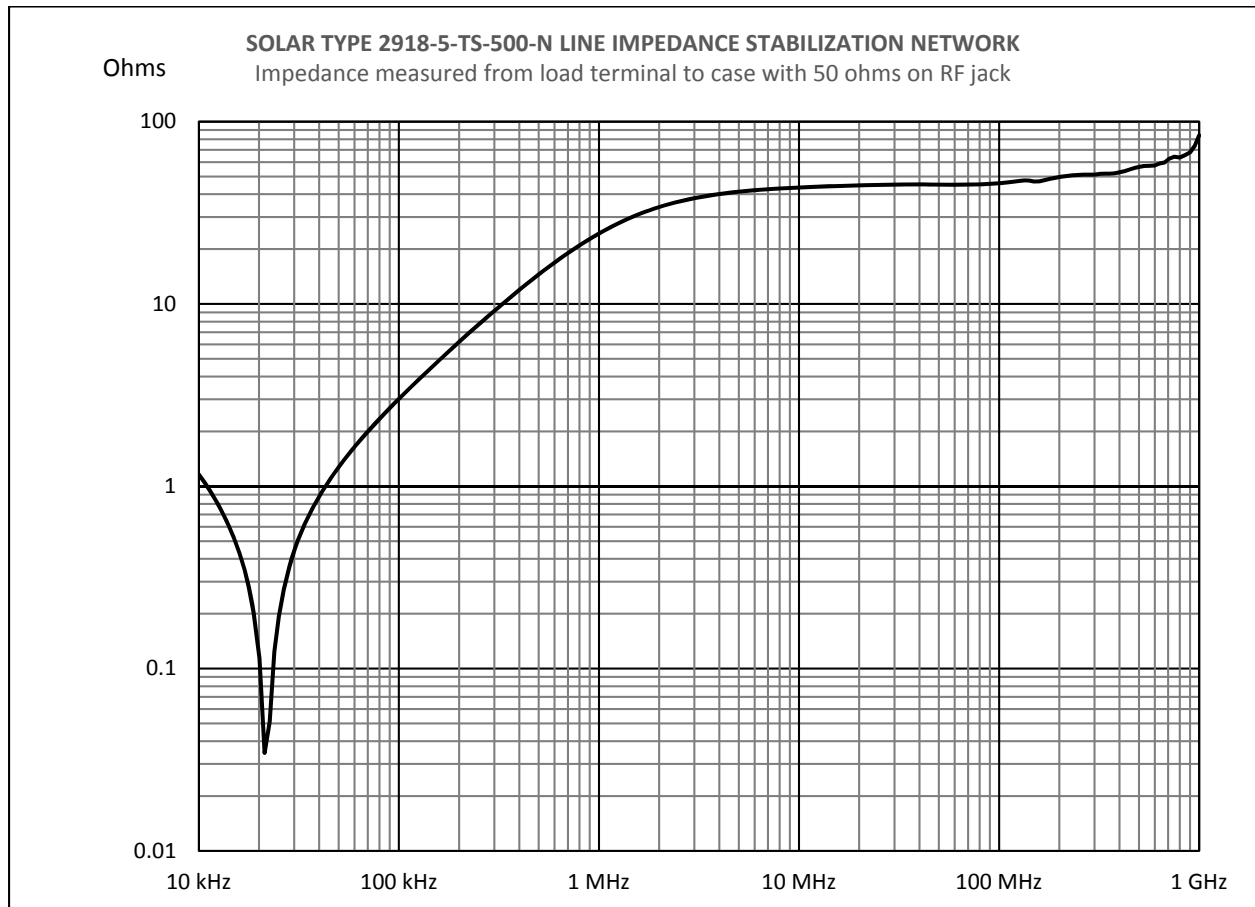

## SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com