

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 8328-50-PJ-50-N SOLAR TYPE 8328-50-TS-50-N

Specifications:

Current rating: 50 amperes
Inductance: 50 μ H
Frequency range (recommended): 10 kHz – 50 MHz
Voltage (line to ground): 600 VDC, 270 V 50-60 Hz, 135 V 400 Hz
Power connections: PJ Supercon plug and jack, TS 1/4-20 threaded studs
RF connector: Type N
Coupling capacitor: 0.10 μ F
Circuit: Single
Case size: 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)
Overall length with base plate: 17.00" (43.18 cm)

Remarks: Designed for FCC Part 15, ANSI C63.4 (1992), and CISPR 16-1 (1993).
Specifications subject to change without notice.

Rev. September 3, 2016

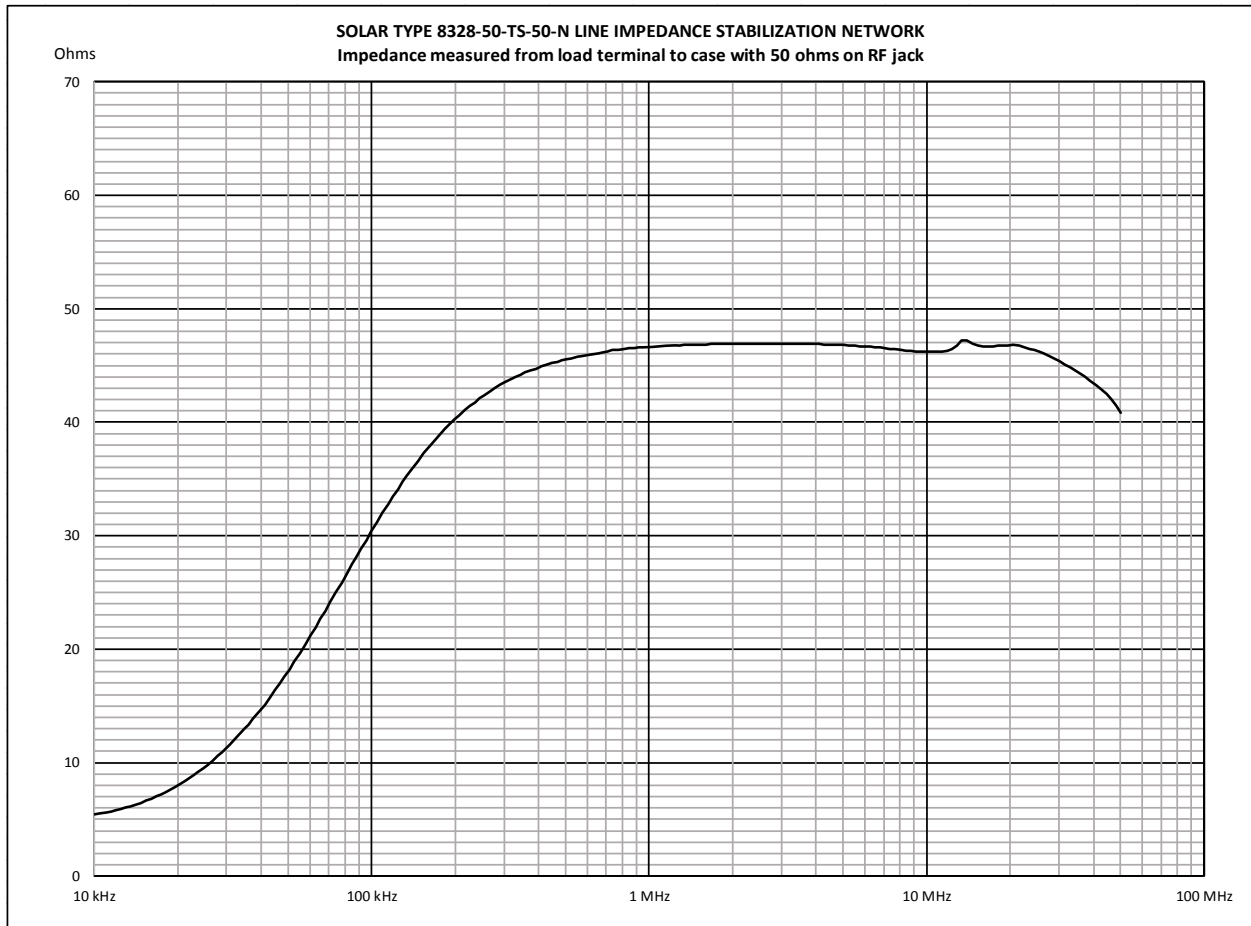

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com