

# SOLAR LINE IMPEDANCE STABILIZATION NETWORK


## SOLAR TYPE 8610-50-PJ-100-N SOLAR TYPE 8610-50-TS-100-N

### Specifications:

Current rating: ..... 100 amperes  
Inductance: ..... 50  $\mu$ H  
Frequency range (recommended): ..... 10 kHz – 30 MHz  
Voltage (line to ground):.....600 VDC, 500 V 50-60 Hz, 240 V 400 Hz  
Power connections:..... PJ Superior Supercon, TS 1/4-20 threaded stud  
RF connector: ..... Type N  
Coupling capacitor: .....0.25  $\mu$ F  
Circuit:..... Single  
Case size: ..... 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)  
Overall length with base plate: 17.00" (43.18 cm). Equipped with 6.50" (16.51 cm)  
50-60 Hz ventilating fan. Specify voltage: 110V/115 V or 220V/230V  
Overall length with base plate and fan overhang: 21.50" (54.61 cm)

**Remarks:** Designed for MIL-STD-461D/E/F/G. Specifications subject to change without notice.

Rev. September 3, 2016

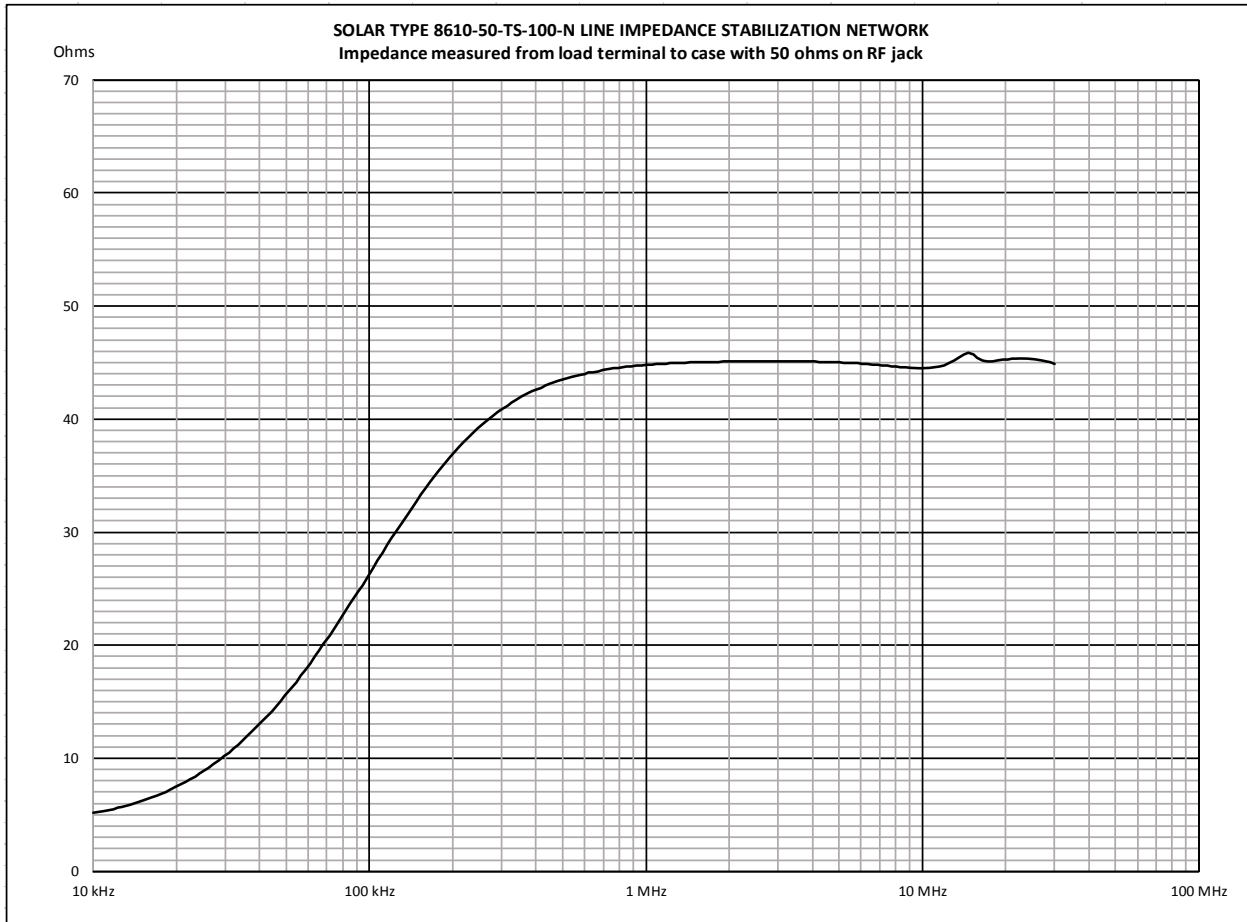

## SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com