

# SOLAR LINE IMPEDANCE STABILIZATION NETWORK


## SOLAR TYPE 9348-50-R-25-BNC

### Specifications:

Current rating: ..... 25 amperes  
Inductance: ..... 50  $\mu$ H with a 250  $\mu$ H series filtering choke  
Frequency range (recommended): ..... 9 kHz – 30 MHz  
Voltage (line to ground): ..... 400 VDC, 270V 50 – 60 Hz, 135V 400 Hz  
Power connections: ..... NEMA AC receptacle and line cord  
RF connector: ..... Type BNC  
Coupling capacitor: ..... 0.25  $\mu$ F  
Circuit: ..... Dual  
Case size: ..... 13.48" x 7.25" x 13.25" (34.24 cm x 18.42 cm x 33.66 cm)  
Overall length with base plate: 17.25" (43.82 cm)

**Remarks:** Designed for CISPR 16-1-2 Ed. 1.2. Switch provided for testing for each line, terminating other line into 50 ohms. Specifications subject to change without notice.

Rev. October 7, 2016

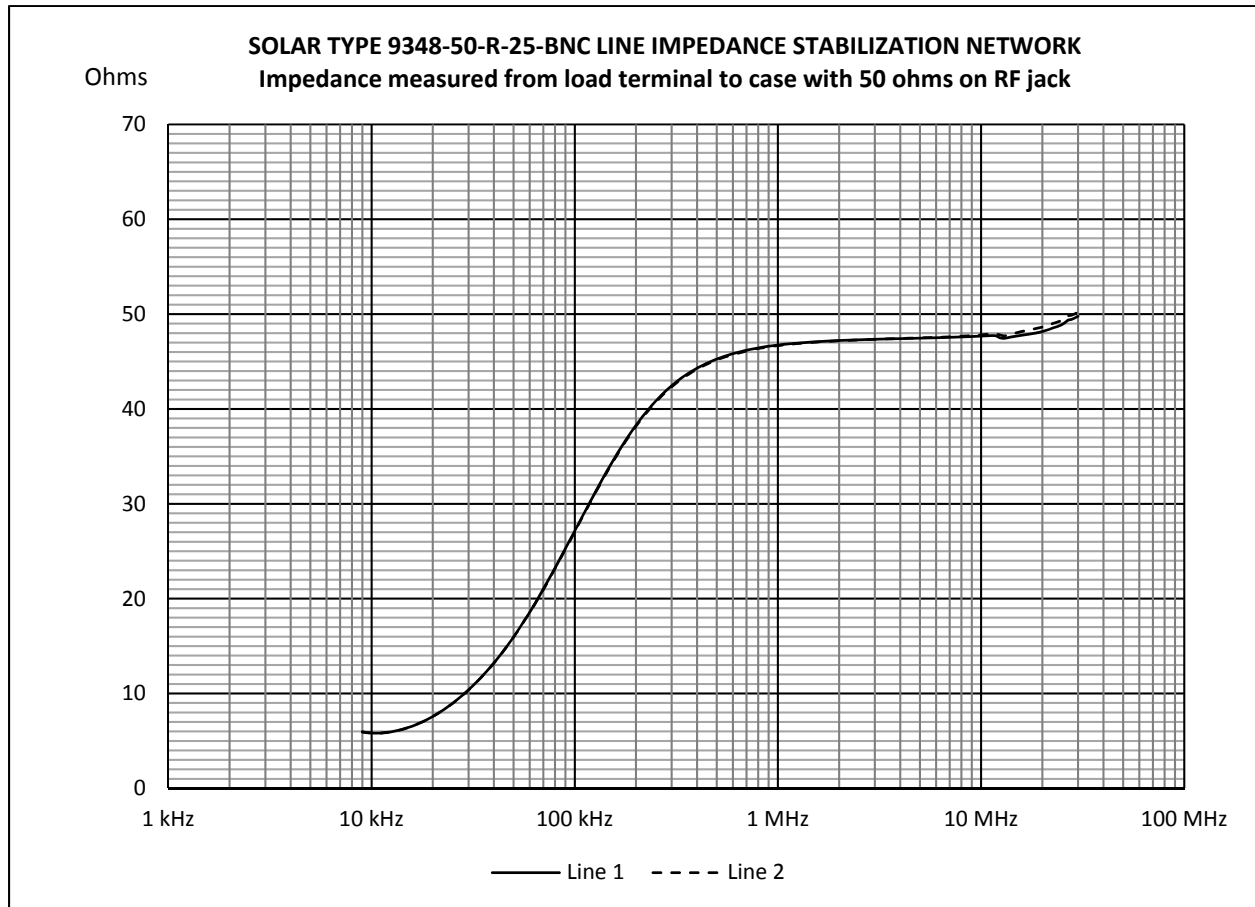

## SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com