

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 9861-50-BP-25-BNC

Specifications:

Current rating: 25 amperes
Inductance: 50 μ H
Frequency range (recommended): 10 kHz – 50 MHz
Voltage (line to ground): 400 VDC, 270 V 50 – 60 Hz, 135 V 400 Hz
Power connections: 3/4" insulated binding posts
RF connector: Type BNC
Coupling capacitor: 0.25 μ F
Circuit: Dual
Case size: 13.48" x 7.25" x 13.25" (34.24 cm x 18.42 cm x 33.66 cm)
Overall length with base plate: 17.25" (43.82 cm)

Remarks: MIL-STD-461D/E/F/G. Specifications subject to change without notice.

Rev. September 3, 2016

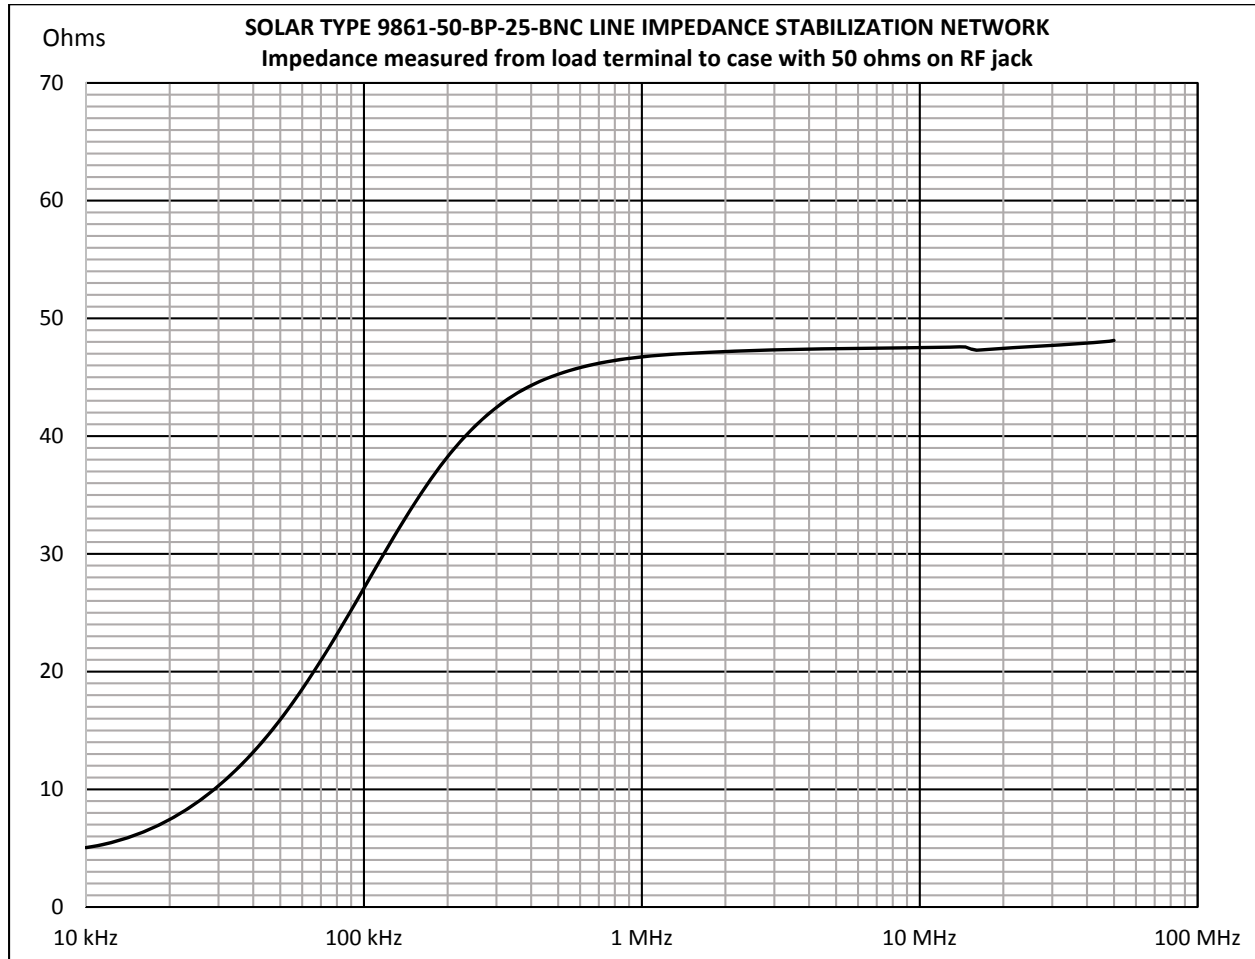

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com