

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 9924-5-TS-100

Specifications:

Current rating: 100 amperes
Inductance: 5 μ H
Frequency range (recommended): 100 kHz - 100 MHz
Voltage (line to ground): 600 VDC, 500 V 50 - 60 Hz, 480 V 400 Hz
Power connections: TS 1/4-20 threaded stud
RF connector: None
Coupling capacitor: 0.10 μ F
Circuit: Single
Case size: 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)
Overall length with base plate: 17.00" (43.18 cm)

Remarks: Designed for ISO 7637-2. Circuit isolated from case. Specifications subject to change without notice.

Rev. March 27, 2018

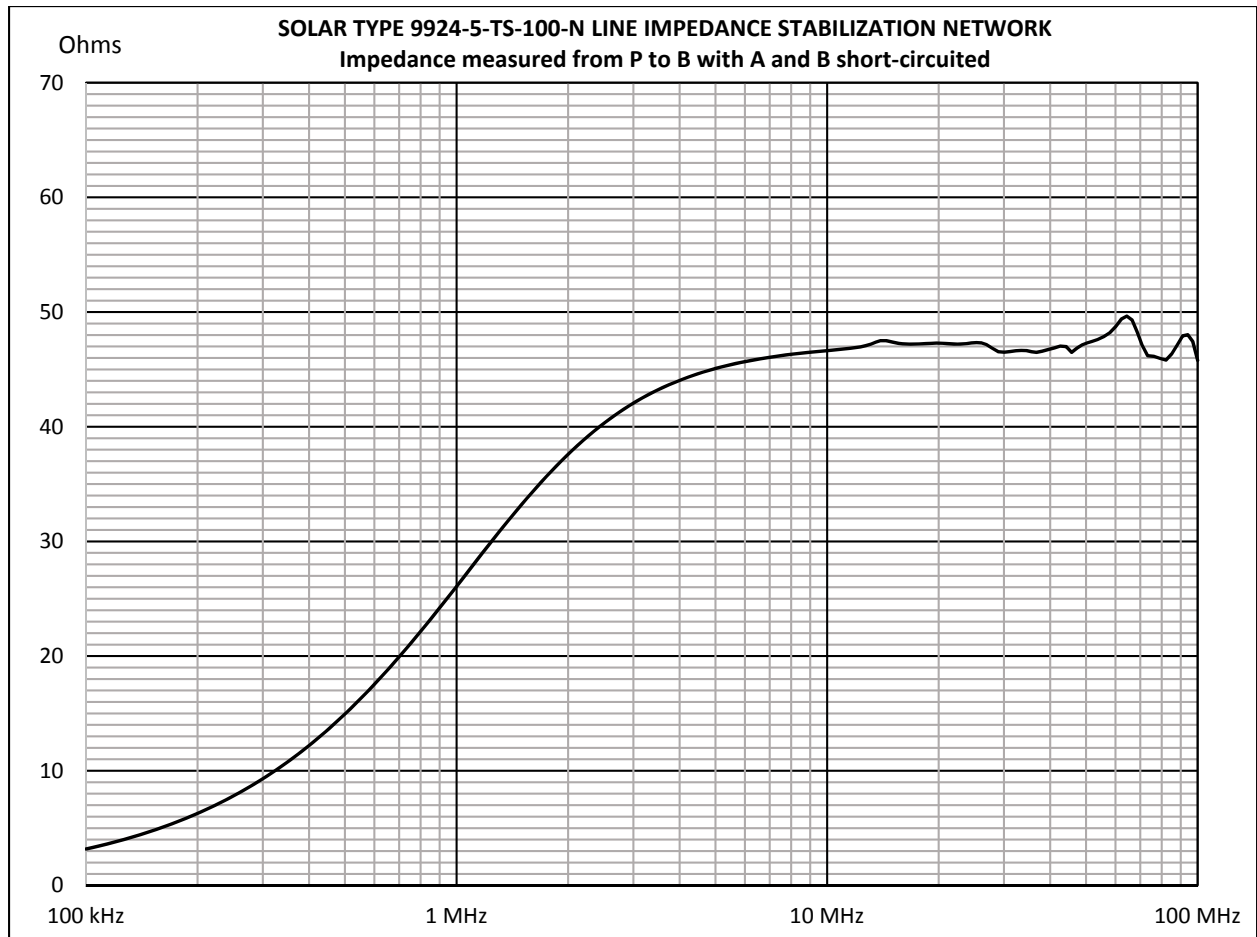

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com