

# SOLAR LINE IMPEDANCE STABILIZATION NETWORK


## SOLAR TYPE 21115-50-TS-100-N

### Specifications:

Current rating: ..... 100 amperes  
Inductance: ..... 50  $\mu$ H  
Frequency range (recommended): ..... 150 kHz – 30 MHz  
Voltage (line to ground): ..... 800 VDC, 500 V 50 – 60 Hz, 240 V 400 Hz  
Power connections: ..... TS 1/4-20 threaded stud  
RF connector: ..... Type N  
Coupling capacitor: ..... 0.10  $\mu$ F  
Circuit: ..... Single  
Case size: ..... 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)  
Overall length with base plate: 17.00" (43.18 cm). Equipped with 6.50" (16.51 cm)  
50-60 Hz ventilating fan. Specify voltage: 110V/115 V or 220V/230V  
Overall length with base plate and fan overhang: 21.50" (54.61 cm)

**Remarks:** Designed to meet the requirements of CISPR 16-1-2 Ed. 1.2. Specifications subject to change without notice.

Rev. June 12, 2017

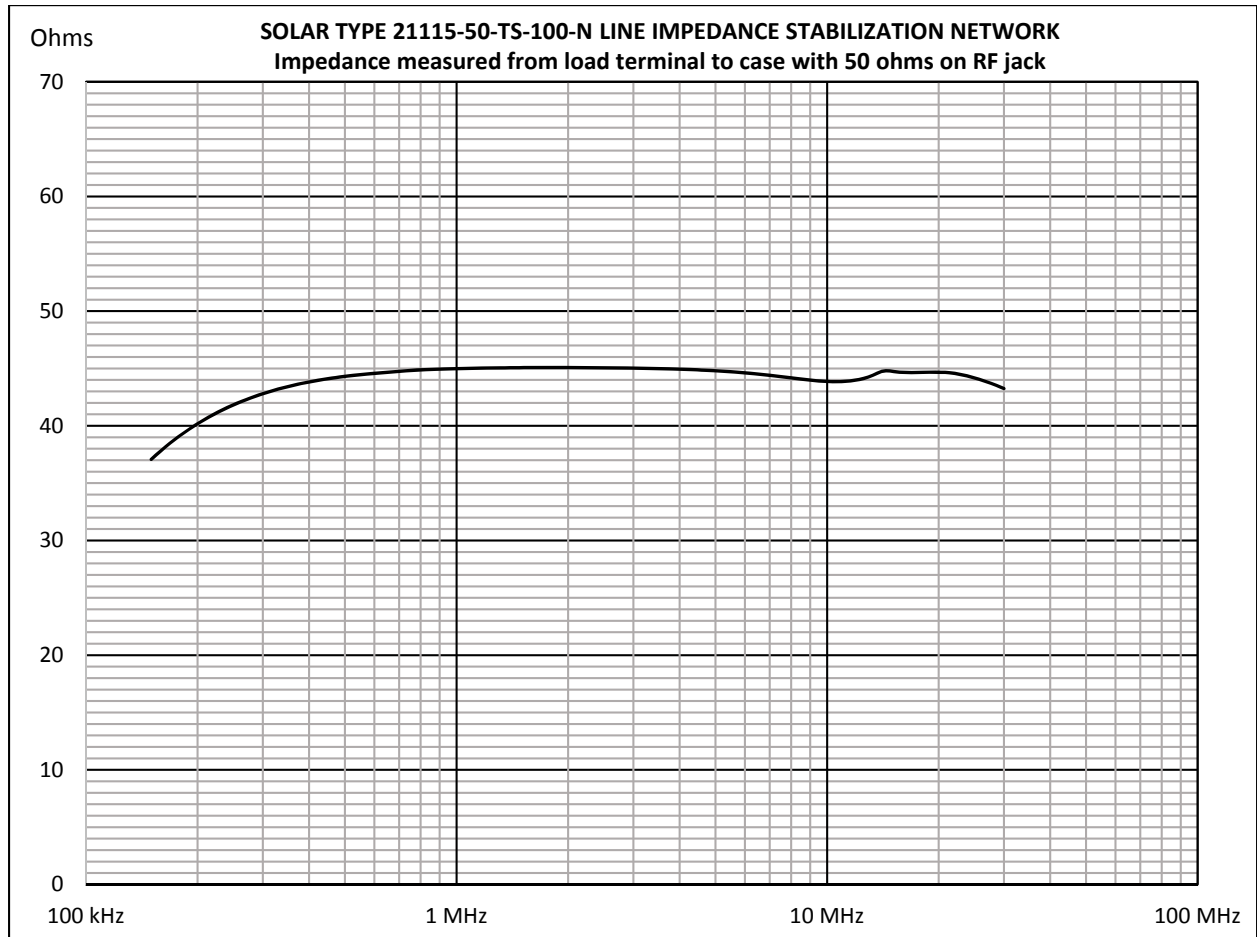

## SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com